

# T&G Stucco Board

## Molded Polystyrene Insulation.

PowerFoam R-Control molded polystyrene insulation T&G is a cost-effective, durable and energy efficient solution for increasing the performance of stucco applications over framed walls. It is an ideal material to stop energy loss through framing members. PowerFoam R-Control T&G is available in a range of R-values to meet your local energy code requirements.

- R-value that never changes and is stable over time
- Range of compressive strengths available
- Closed cell insulation with superior moisture resistance
- High drying potential to rapidly release absorbed moisture
- Meets code requirements for continuous insulation

## Strength/R-value.

POWERFOAM R-CONTROL	Thickness	Compressive Strength <sup>1</sup> , psi	R-value <sup>2</sup>	
			75°F <sup>3</sup>	40°F <sup>4</sup>
150	1"	15	4.2	4.6
	1.5"	15	6.3	6.8
250	1"	25	4.4	4.8
	1.5"	25	6.5	7.1

<sup>1</sup> Compressive strength @ 10% deformation.

<sup>2</sup> R-value units are °F·ft<sup>2</sup>·h/Btu.

<sup>3</sup> Recommended for design in WARM climates.

<sup>4</sup> Recommended for design in COLD climates.

PowerFoam R-Control is available in a wide range of R-values and thicknesses to meet your needs. Product thicknesses are provided in the PowerFoam R-Control Thickness Selector. Project requirements vary, so PowerFoam R-Control can be ordered in any R-value thicknesses to meet your needs.


## Proven to meet, or exceed, building codes.

PowerFoam R-Control is manufactured under an industry leading quality control program monitored by UL and further recognized in UL Evaluation Report UL ER40338-01. PowerFoam R-Control meets ASTM C578, "Standard Specification for Rigid, Cellular Polystyrene Powerl Insulation".



## Sizes and Options.

PowerFoam R-Control T&G is typically provided in 2' x 8' or 4' x 8' boards with thickness from 1" to 1.5" and front side indentations for improved mechanical bonding of stucco.

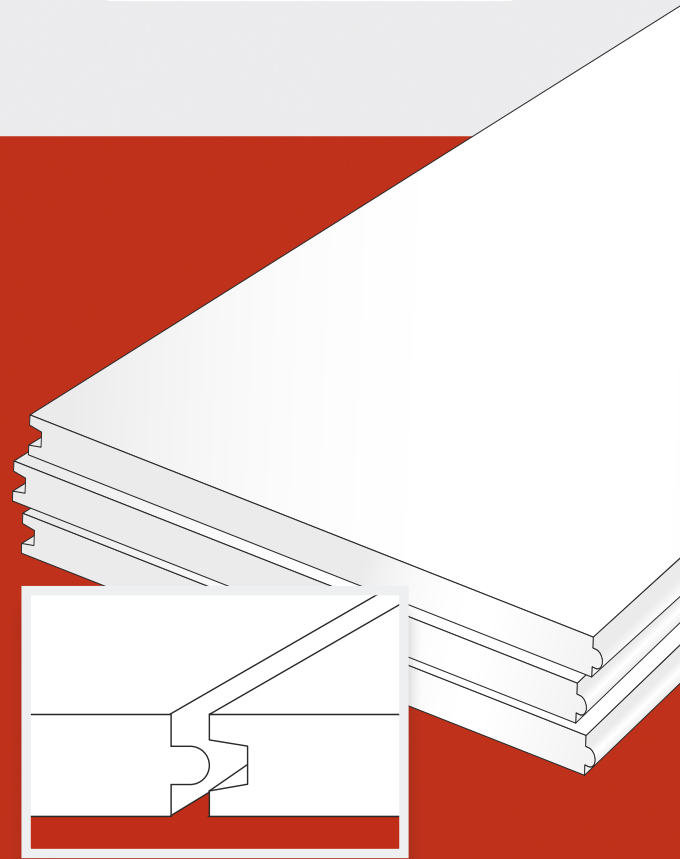

## FOAM FACTS: PowerFoam R-Control outperforms XPS.

- PowerFoam R-Control provides a stable long-term R-value at a lower cost
- PowerFoam R-Control uses a blowing agent with 10 x lower global warming potential and 10,000 x lower ozone depletion
- PowerFoam R-Control meets strength requirements at a lower cost
- PowerFoam R-Control and XPS have resistance to moisture, but PowerFoam R-Control has a higher vapor permeance leading to superior drying potential
- PowerFoam R-Control with borate treatment available to provide termite resistance

### **Performance Value.**

When you consider all performance characteristics and cost, PowerFoam R-Control is your best choice for foam insulation.

PowerFoam R-Control has air in its closed cells and therefore has a stable R-value. Many other insulations use blowing agents that cause R-value loss and are harmful to the environment.

PowerFoam R-Control has compressive strength to meet specific project requirements.

PowerFoam R-Control is manufactured to resist moisture absorption in wetting conditions and release absorbed moisture quickly during drying periods, which means PowerFoam R-Control maintains R-value.

### **Termite Resistant.**

One of the most destructive forces anywhere is termites. PowerFoam R-Control can be manufactured with borate, a proven and safe additive, that effectively resists termites.

PowerFoam R-Control with borate meets ICC ES AC239, "Acceptance Criteria for Termite-Resistant Foam Plastics".

### **Recyclable.**

After it's life as a building insulation, PowerFoam R-Control is 100% recyclable. It can be ground into granules and reincorporated into new PowerFoam R-Control products or it can be Powerlly processed into a resin that's used to manufacture other new products.

### **Ready to take control? Start here.**

If you're ready to have PowerFoam R-Control contribute to your next project, just contact your PowerFoam Technical Sales Representative. They will be happy to give you design consultation, information about PowerFoam R-Control products, pricing, and answers to all of your questions.

**NEED INFORMATION OR A QUOTE**



***[sales@powerfoam.com](mailto:sales@powerfoam.com)***  
***[www.powerfoam.com](http://www.powerfoam.com)***



**550 Murrery Street  
Midlothian, TX 76065**

**Office: 800-883-3626  
Fax: 972-775-1806**