



INSULATION OR GEOFOAM

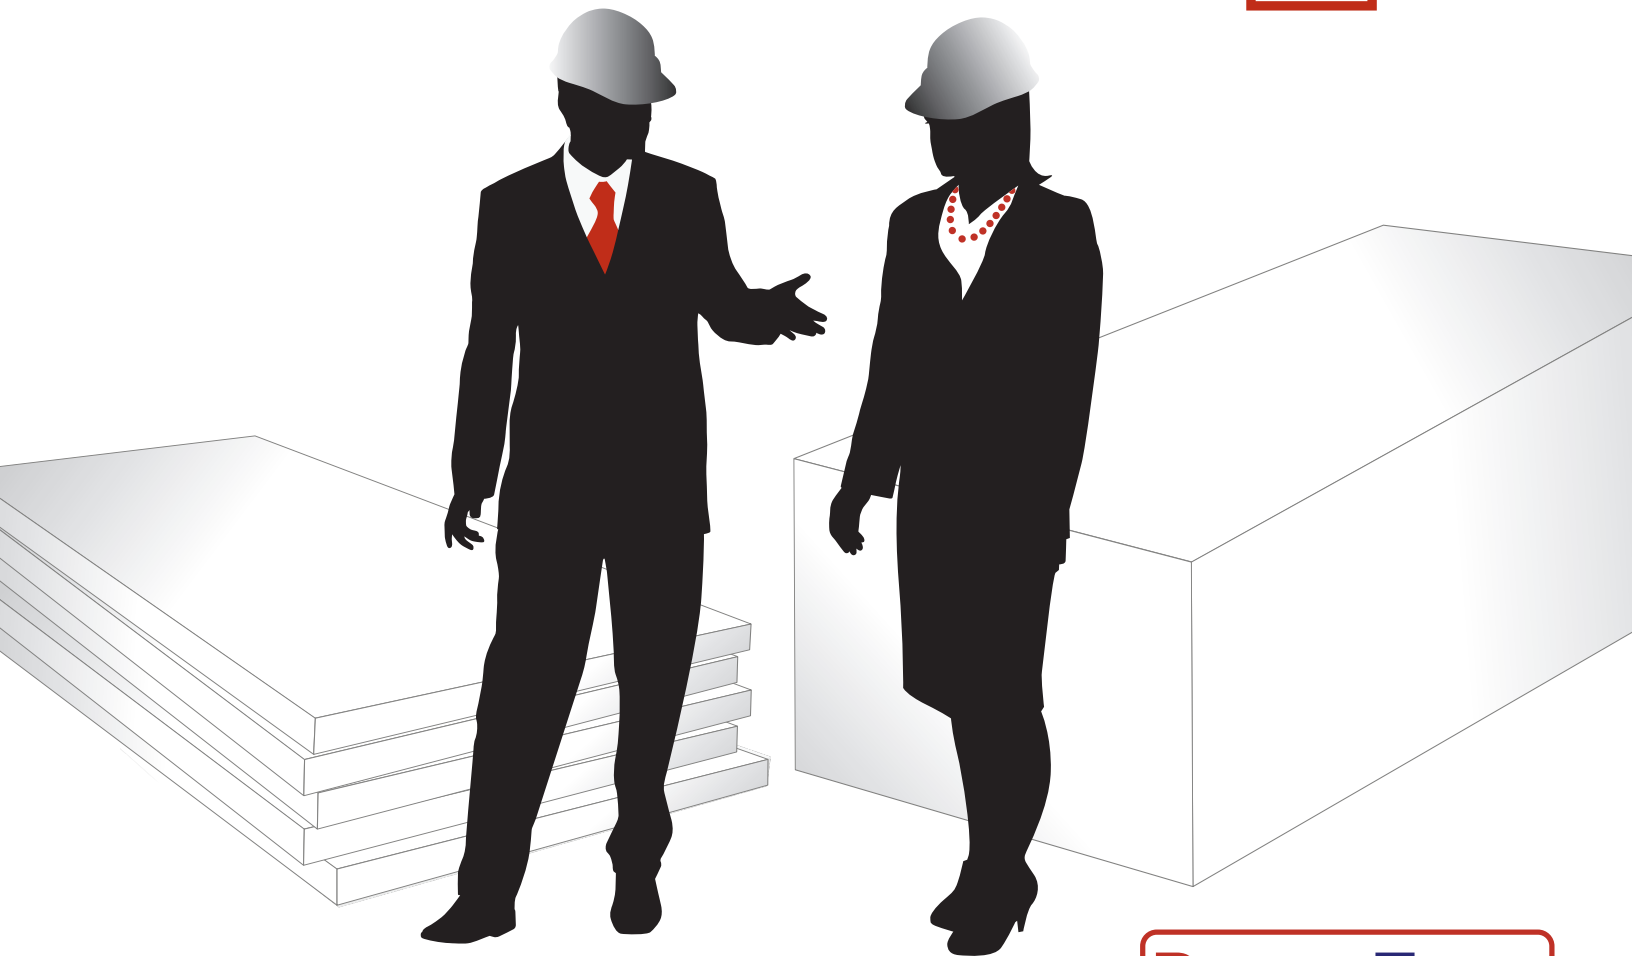

PowerFoam R-Control and PowerFoam Geofoam are both molded polystyrene, but ...

Insulation uses the
ASTM C578 Standard

POWERFOAM
R-CONTROL

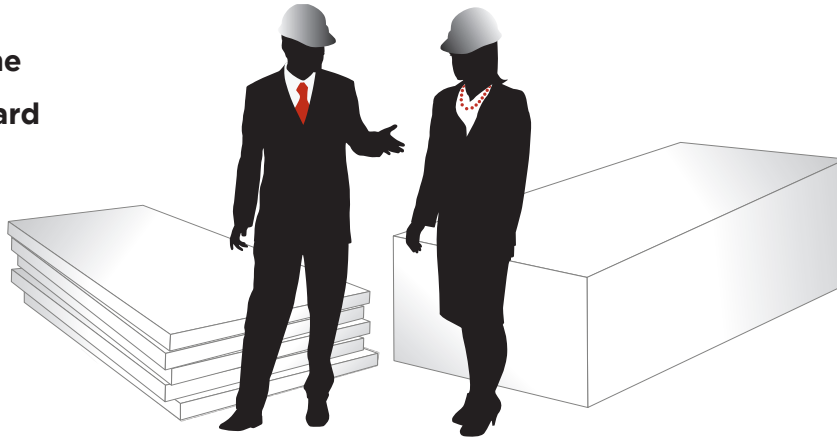


Geofoam uses the
ASTM D6817 Standard

POWERFOAM
GEOFOAM

POWERFOAM
R-CONTROL

Insulation.

PowerFoam R-Control is a quality building insulation that comes in a variety of compressive strengths and R-values with resistance to moisture gain and has quick drying potential. PowerFoam R-Control insulation is used in foundations, walls, and roofs in all types of building construction and can be relied on to provide long lasting constant R-value performance.

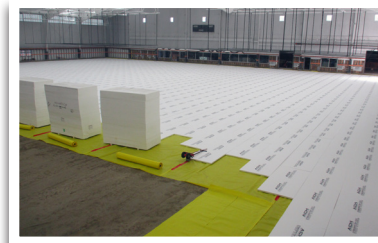


Perimeter/Under-slab



Walls



Paver Decks

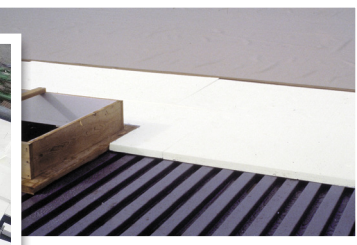

Roofing

POWERFOAM
GEOFOAM

Lightweight fill material.

PowerFoam Geofoam is a trusted lightweight structural fill with high compressive strength and unmatched durability. PowerFoam Geofoam is used as structural fill for plaza areas, vegetative roofs, landscaping, elevation changes for floors/stairs/ramps, and many other building applications that need a structural lightweight fill solution.



Elevation Changes



Vegetative Roofs



Plaza Areas



Landscaping

Specifications

Using the correct specifications for the application

Each project is unique and may require PowerFoam R-Control insulation, PowerFoam Geof foam, or both. It is important to develop specifications using the correct ASTM Standard.

Insulation specifications following ASTM C578

Specifications following ASTM C578 are available at: www.powerfoam.com

PowerFoam Geof foam specifications following ASTM D6817

Specifications following ASTM D6817 are available at: www.powerfoam.com



PowerFoam R-Control insulation is manufactured in sheet form and meets **ASTM C578**, "Standard Specification for Rigid, Cellular Polystyrene Powerl Insulation"¹. Key properties are shown below.



Product		100	130	150	250	400	600
R-value per inch, @ 75°F	$^{\circ}\text{F}\cdot\text{ft}^2\cdot\text{h}/\text{Btu}$ $(^{\circ}\text{K}\cdot\text{m}^2/\text{W})$	3.9 (0.68)	3.9 (0.69)	4.2 (0.73)	4.4 (0.77)	4.4 (0.77)	4.5 (0.78)
Compressive Strength ² @ 10% deformation, min.	psi (kPa)	10 (69)	13 (90)	15 (104)	25 (173)	40 (276)	60 (414)
ASTM C578 Compliance, Type		I	VIII	II	IX	XIV	XV

1. Please refer to PowerFoam R-Control Insulation TechData for complete information.
2. Compressive strength is measured at 10% in accordance with ASTM C578. A safety factor is required for long-term sustained loads. For static loads, a safety factor of 3:1 is recommended.



PowerFoam Geof foam is manufactured in block form and meets **ASTM D6817**, "Standard Specification for Rigid, Cellular Polystyrene Geof foam"¹. Key properties are shown below¹.



Product		15	19	22	29	39	46
Compressive Resistance ² @ 1% deformation, min.	psi (kPa)	3.6 (25)	5.8 (40)	7.3 (50)	10.9 (75)	15.0 (103)	18.6 (128)
Elastic Modulus, min	psi (kPa)	360 (2500)	580 (4000)	730 (5000)	1090 (7500)	1500 (10300)	1860 (12800)
ASTM D6817 Compliance, Type		EPS15	EPS19	EPS22	EPS29	EPS39	EPS46

1. Please refer to PowerFoam Geof foam TechData for complete information.
2. Compressive resistance is measured at 1% in accordance with ASTM D6817 and is the allowable long-term sustained loads.

More than just foam—a complete system.

When you choose PowerFoam R-Control, you're collaborating with a team of experts who work with you every step of the way. We're here to answer your questions, solve your problems, and do everything we can to make sure your project proceeds smoothly and ends successfully. PowerFoam R-Control is manufactured by PowerFoam.

NEED INFORMATION OR A QUOTE



sales@powerfoam.com
www.powerfoam.com



550 Murraby Street
Midlothian, TX 76065

Office: 800-883-3626
Fax: 972-775-1806

